

FI €ÁÚà ^ÁÚ ઁ æð ÁÓ[||æð å ÚæçÃà } ÆÁÚ|æ) cÁT [ઁ } c^ å







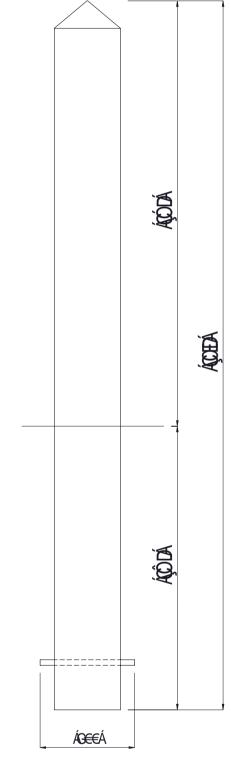

 $\hat{O}[\ \|[\ \lq\, \mid\bullet \ \text{Abd},\ \tilde{a}\ @\bullet \bullet \text{A}\ @]\ _{\}}\ \text{Abd}^{\wedge}\text{Ab},\ \tilde{a}\ \tilde{a}\ \text{Bosenso},\ \land (\tilde{h}\ _{)}\ |\ \land \text{Abd},\ \tilde{a}\ A'\ \text{ae}\ \hat{A}\ \tilde{a}\ \tilde{a}-\ \land (\tilde{h}\ \tilde{a}\ \tilde{a}\ \tilde{A})$

Overall Length (A)	Above Ground (B)	Below Ground (C)
900mm	500mm	400mm
1200mm	700mm	500mm
1500mm	900mm	600mm

SPECIFICATIONS

Code	BOL0545 - 900mm Long Overall BOL0546 - 1200mm Long Overall BOL0547 - 1500mm Long Overall	• H5 • Rar 90
Material	H5 Treated Pine	• Ste
Diameter	140 x 140 Gauged Pine Post	
Weight	10 Kg	
Mounting	Cast into Concrete Footing	

FEATURES

- H5 treated Pine for long life
- Range of sizes available -900mm, 1200mm or 1500mm long
- Steel bar for fixing into concrete supplied

• Bollards are not supplied with installation instructions, install fastenings or footing details. These are to be specified and determined by the installing contractor for the specific requirements of each site.