




# Ø114 Cast Head Bollard

## London | Removable

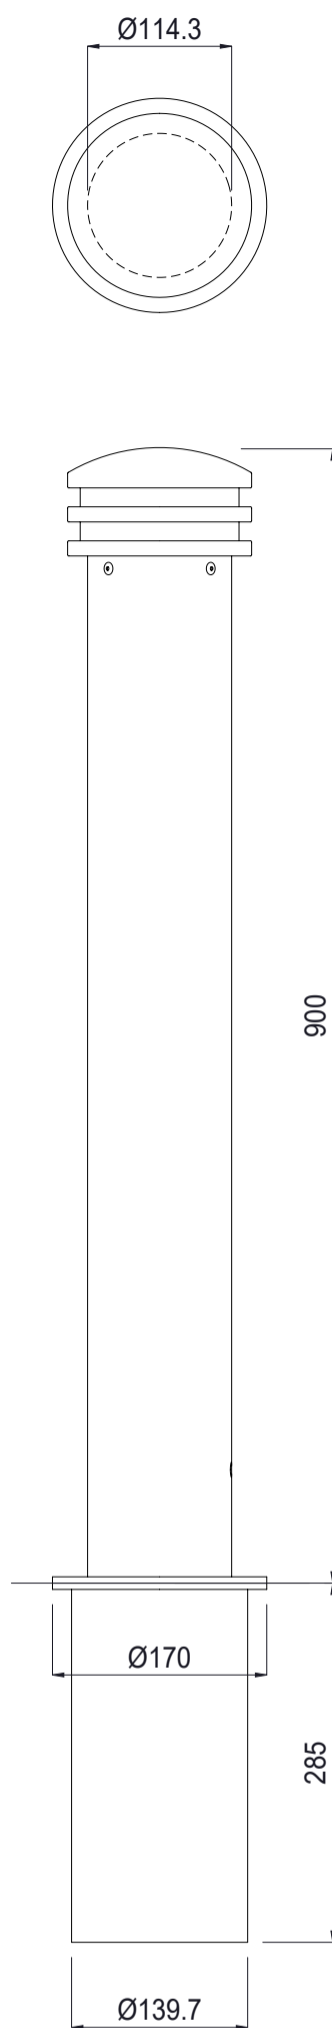

HEAD No1



HEAD No2

Colours / finishes shown are indicative only and may differ in reality.

### SPECIFICATIONS

<b>Code</b>	BOL0190 - S/S Body, Cast Head & Skirt - Hot Dip Galvanised Socket BOL0187 - Mild Steel Body, Cast Head & Skirt - Hot Dip Galvanised Socket
<b>Material</b>	304 Stainless Steel or Mild Steel Galvanised
<b>Height</b>	900mm Above Ground 285 Below Ground (1185mm Overall)
<b>Diameter</b>	Ø114.3 x 3.05 Wall Pipe - Stainless Steel Ø114.3 x 4.5 Wall Pipe - Mild Steel
<b>Weight</b>	22 Kg (Removable Bollard)
<b>Mounting</b>	Socket Cast into Concrete 285mm Deep

### FEATURES

- 304 grade stainless steel electropolished with powdercoated cast head
- Mild steel hot dip galv & powdercoated with powdercoated cast head
- Cast aluminium head in range of designs - powdercoated finish
- Hot dip galvanised inground socket with optional lockable cover
- Removable and lockable bollard (hex key lock - key supplied)

• Bollards are not supplied with installation instructions, install fastenings or footing details. These are to be specified and determined by the installing contractor for the specific requirements of each site.